



The AF-2000 filter is a media filter vessel designed to treat liquid streams. While the typical design application is a activated carbon adsorbion unit, the filter can easily accommodate many medias. Some applications include:

- Dissolved Organic Removal (Activated Carbon)
- Suspended Solids Removal (Sand Filter)
- Dissolved Minerals (Softener Resin)
- Oil and Grease Removal (Organo-Clays)
- Dissolved and Precipitated Metals Removal
- Special Organics (Resin/Carbon Blend)
- Catalytic Reactor (Chlorine and Peroxide Removal)
- Bio-Remediation Contactor Unit

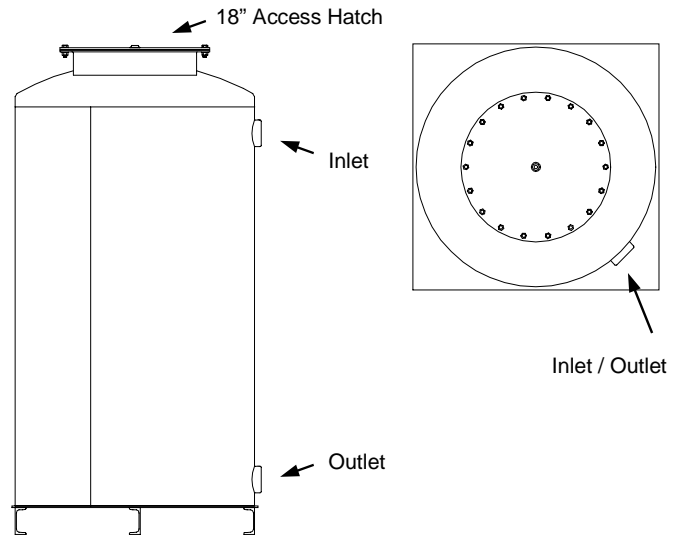

PRESSURE DROP GRAPH
(As Filled - 8*30 GAC)

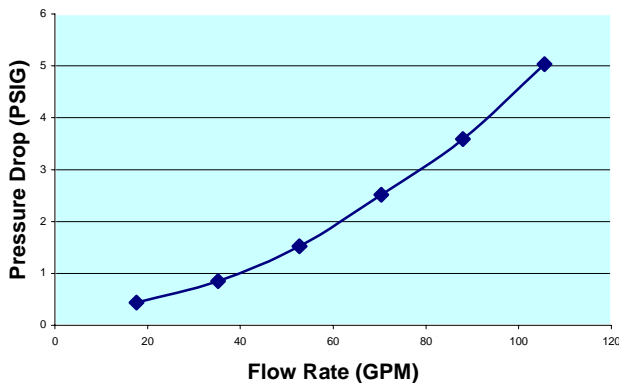

AF-2000 SPECIFICATIONS

Overall Height	7'4"	Vessel/Internal Piping Materials	CS (SA-36) / SCH 40 PVC
Diameter	48"	Internal Coating	Polyamide Epoxy Resin
Inlet / Outlet (FNPT)	3"	External Coating	Epoxy Mastic
Drain / Vent (FNPT)	OPT / 1/4"	Maximum Pressure / Temp	40 PSIG / 140° F
GAC Fill (lbs)	2000	Cross Sectional Bed Area	12.5 FT ²
Shipping / Operational Weight (lbs)	2,925/6,400	Bed Depth/Volume	5.5 FT / 68.7 FT ³

Tetrasolv Filtration
1200 East 26th Street - Anderson, Indiana 46016 U.S.A
Phone (765) 643-3941 Fax (765) 643-3949 Email: info@tetrasolv.com